

19" FLOOR MOUNT NETWORK/SERVER RACKS

Features:

- Available in 18U, 27U, 36U & 42U with a Load Bearing capacity of 800 Kg, 1000 Kg, 1000 Kg & 1200 Kg
- Available in RAL 7016 & RAL 9005
- Fabricated using CRCA steel with Powder Coated Finish.
- Comply with EIA 310 D & IEC 297
- Suitable for Data Centers, Communication Rooms etc.
- Offering an Ingress Protection Rating, IP 20
- 86% Perforated Metal front and rear doors for heat/air dissipation.
- Option with Toughened Glass front door is also available
- Tool less installation and removal of front and rear doors
- 180° opening for the front door and removable side panels
- Space saving dual split doors
- Rotary handle with an inbuilt lock for front and rear doors
- Cable Entry provisions provided from top and bottom of the Rack
- Provision to mount the Fan Tray on the top of the Rack.
- Two pair of 19" Vertical Extrusions (Mounting Profile), adjustable from inside.
- Offering Sticker free numbered U positions
- Coming with 6 points of grounding at the Bottom and 1 point of grounding at the top.
- Coming with castor wheels, Levelling Feets and Vertical cable Managers**



**Vertical Cable Managers are provided for Racks having a width of 800 mm and above.


DETAILS OF MATERIAL USED FOR FABRICATION

CRCA Steel, Thickness of Vertical Extrusions/Mounting Profile: 2 mm,
Top & Bottom Panel : 1.6 mm; others : 1.2 mm

SURFACE FINISH

Degreasing, Pickling, Seven Tank Hot Phosphating, Cleaning & Powder Coating

19" FLOOR MOUNT NETWORK/SERVER RACKS

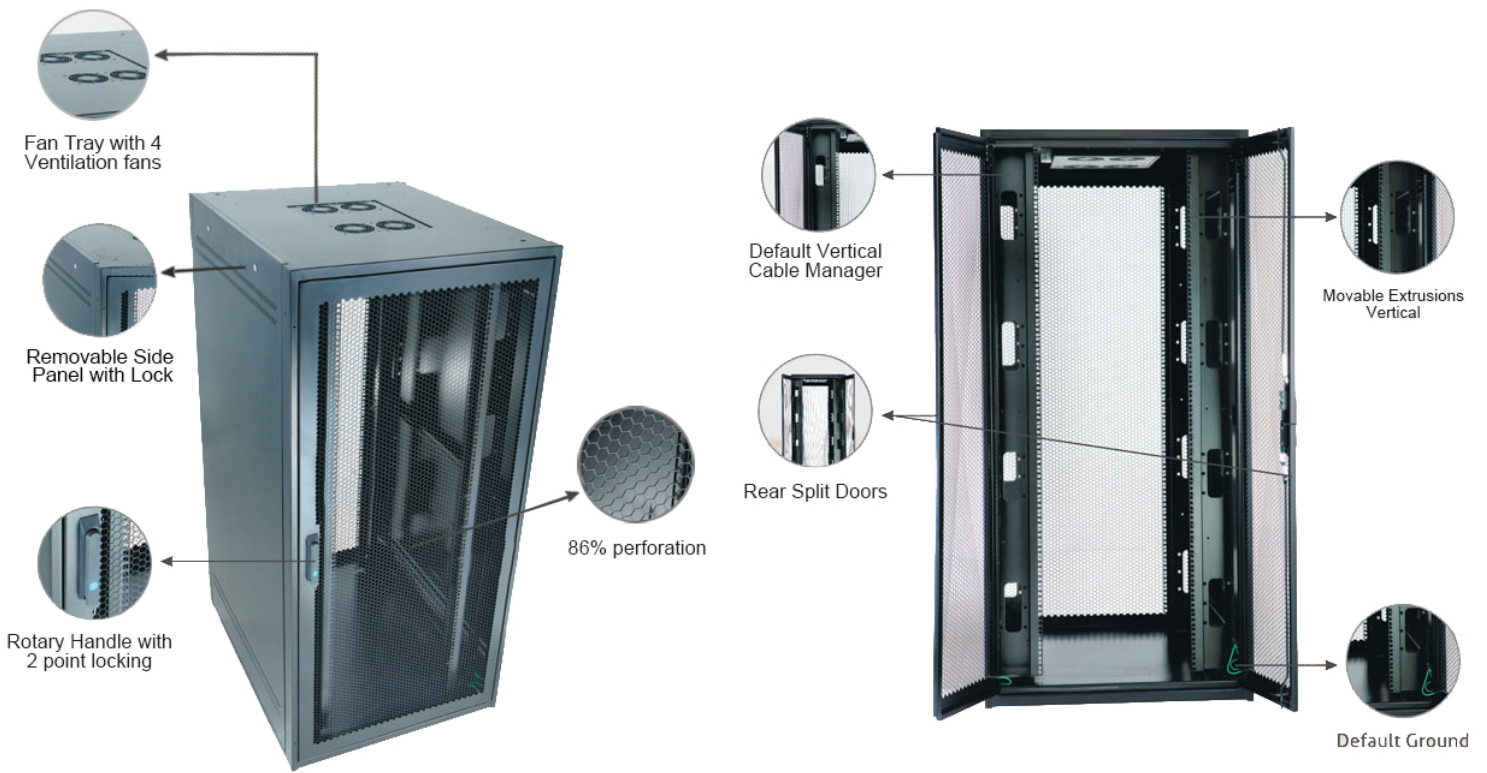

Front View



Rear View



19" FLOOR MOUNT NETWORK/SERVER RACKS

Available Models

Model No./Part No.	Height (U)	Actual Unit Dimension(mm)			Load Bearing Capacity(Kg)
		H	W	D	
NYS-FMSR-608042U	42	1978	600	800	1200
NYS-FMSR-6010042U	42	1978	600	1000	1200
NYS-FMSR-6012042U	42	1978	600	1200	1200
NYS-FMSR-808042U	42	1978	800	800	1200
NYS-FMSR-8010042U	42	1978	800	1000	1200
NYS-FMSR-8012042U	42	1978	800	1200	1200
NYS-FMSR-608036U	36	1748	600	800	1000
NYS-FMSR-6010036U	36	1748	600	1000	1000
NYS-FMSR-808036U	36	1748	800	800	1000
NYS-FMSR-8010036U	36	1748	800	1000	1000
NYS-FMSR-8012036U	36	1748	800	1200	1000
NYS-FMSR-608027U	27	1311	600	800	1000
NYS-FMSR-6010027U	27	1311	600	1000	1000
NYS-FMSR-6012027U	27	1311	600	1200	1000
NYS-FMSR-808027U	27	1311	800	800	1000
NYS-FMSR-8010027U	27	1311	800	1000	1000
NYS-FMSR-8012027U	27	1311	800	1200	1000
NYS-FMSR-606018U	18	880	600	600	800
NYS-FMSR-608018U	18	880	600	800	800
NYS-FMSR-6010018U	18	880	600	1000	800

Note: All the above models are available in RAL 7016 & RAL 9005. Other selected colors may available upon request.

19" FLOOR MOUNT NETWORK/SERVER RACKS

Available Accessories

- Horizontal Power Distribution Unit
- Vertical Power Distribution Unit
- Fan Tray with 4 Fans (90 CFM each)
- 100 mm Plinth
- 1 U Blank Panel
- 2 U Blank Panel
- 1 U Brush Panel
- Component Shelf